

LED Floodlight

ULFL100

Features



- Mounting Type : Bracket Mounted
- Material (Body) : Alum Housing with Glass Cover
- Lamp : Philips Lumileds SMD LED
- Color Rendering : Ra 80
- Voltage : 90V - 305V AC
- Dimmable : Optional

LED Type SMT	Equivalent 250W
Lifespan 50,000 Hours	IP rating IP65
LED Driver Ext.	PF 0.95
Oper. Temp -20C°~50C°	Weight 5kg

USHIO

System Power : 100W

 120°	ULFL100/30/11K/C0	3000K	11000 lm
	ULFL100/40/11K/C0	4000K	11000 lm
	ULFL100/50/11K/C0	5000K	11000 lm

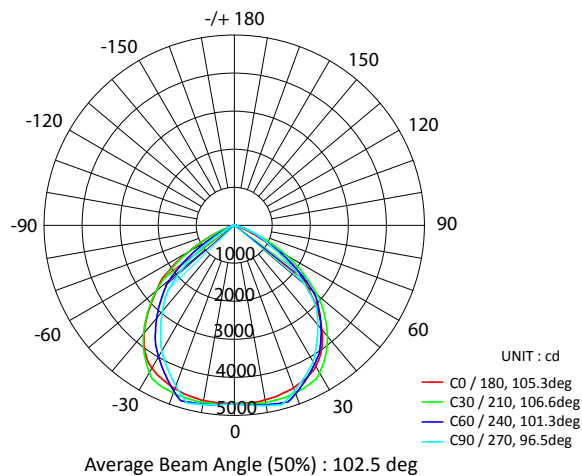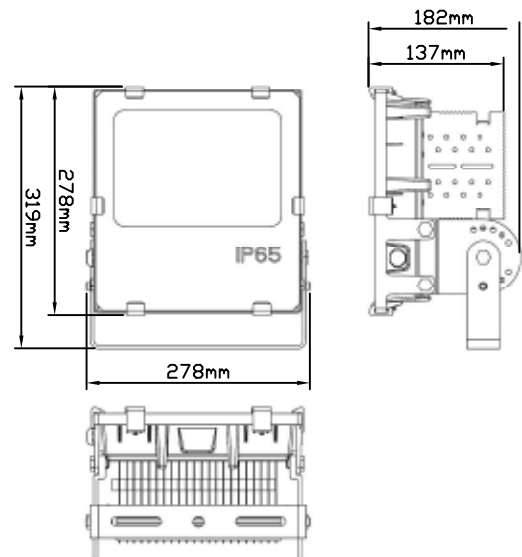

USHIO

■ USHIO ASIA PACIFIC PTE LTD
28 Genting Lane #05-05 Platinum 28, Singapore 349585
TEL +65 6274-5311 FAX +65 6274-5300
URL www.ushioasiapacific.com

■ USHIO ASIA PACIFIC (Thailand) LTD
Le Concorde Tower, Room 2006 (20F) 202 Rachadapisek Road, Huaykwang,
Bangkok 10320 Thailand
TEL +66 2 694-1440 FAX +66 2 694-1770
URL www.ushioasiapacific.com